



WHAT ELSE DO I NEED?

- Top of knee Connectors & Alignment Systems
See Selector Chart™ For Adult Knees With 4-Threaded Holes + Center Bolt
- Pylon: (ø 30mm)
- Ankles:
- Feet:
- Foam Covers: - 1-part Foam Cover.....
- Discontinuous 2-part
- Skin and other finishings:

Section 3.2B	p.01
Section 5A	p.01
Section 6A	p.01
Section 7A	p.01
Section 9.1A	p.01
Section 9.1A	p.04
Section 9.2A.1	p.01

TECHNICAL DATA

▢	Knee Weight:	18.4 oz (454 g)
▢	Patient Weight Limit:	200 lbs (90 kg) ⚡
Ø	Pylon Diameter:	30 mm
	Knee Center to Top of Knee:.....	1 in (2.5 cm)
	Knee Center to Most Distal End:.....	4 in (12 cm)
	Pylon Housing from Most Distal End:	17/16 in (3.6 cm)
	Knee Center to Top of Pylon:	21/2 in (6.3 cm)
	Knee Center to Knee Cap at 90° Flexing:	11/16 in (2.8 cm)



DAW®


INDUSTRIES



AK

SELECTOR CHART FOR DK-4200

SELECTOR CHART™

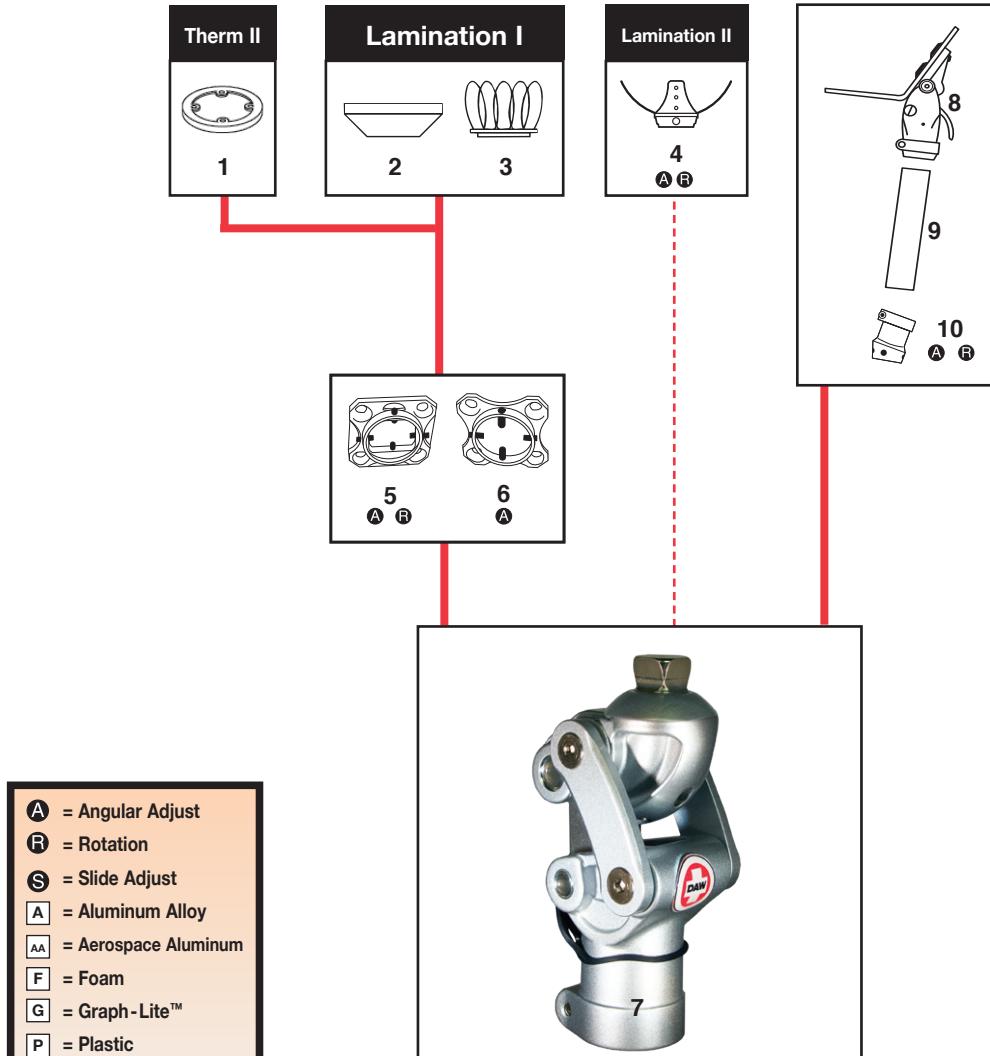

**DAW®
INDUSTRIES**