

1C1™ Knee (TK-1C1)

A Light-Weight, Dependable Monocentric Pediatric Knee with a Manual Lock.

As your Patient's mobility improves, the manual lock can be permanently disengaged, and the Extension Assist can be tuned to preference.

Primary benefits:

- ✓ **Cost effective, durable Aluminum Alloy construction.**
- ✓ **Friction Adjustment with Forever-Setting™.** Unless desired, your original friction setting never needs future re-adjustment.
- ✓ Option to permanently disengage Manual Lock.
- ✓ Adjustable Manual Lock Free Play.
- ✓ Proven reliability, zero maintenance.
- ✓ Forever-smooth stainless ball bearing axes.



Complete Info & Images @ daw-usa.com

Suggested K2 L-Codes* **L5811** **L5850**

(See Full Suggested Coding Statement on pg. 53)

Knee Specifications:

Stock Number	TK-1C1
Functional Level	K2
Amputation Level	TF or Knee Disarticulation
Weight Limit	121lb (55kg)
Knee Weight	0.68lb (309g)
Construction Material	Aerospace Aluminum
Build Height	(See Next Page)
Stability Control	Optional Manual Lock
Swing Controls	Friction Adjustment with Forever-Setting™ & Extension Assist Adjustment
Maximum Flexion Angle	Approx. 130°
Proximal Connection	Single Hole for 3/8 Bolt (See Selector Chart, Next Page)
Distal Connection	22mm Tube Clamp
Warranty	2 years included, Upgrade for an Additional 3 Years

Order Includes:

- 1x** Manual Lock Release Assembly
- 1x** Practitioner's Manual
- 1x** Suggested L-Codes Letter

Recommended Foot:



**K2 Feather-Lite™ Foot
w/ Multi-Axial Ankle**

Full info on page 60

Recommended Rotator:















Lo-Pro Rotator™


Proximally Attach ANY
4-Hole Connector

Full info on page 82

1C1™ Knee

Proximal Attachments Selector Chart

Lamination 1	Lamination 2	Lamination 3	Lamination 4	Lamination 5
 <p>1 100lb</p> <p>4x M5 Screws</p>	<p>ADULT 4-HOLE PATTERN</p>	 <p>2 A 165lb</p>	 <p>3 R 165lb</p>	 <p>4 R 165lb</p>
 <p>5 A 165lb</p>	<p>ADULT to PEDIATRIC</p>  <p>6 R 165lb</p>	<p>PEDIATRIC STAATS Adapter</p> <p>Coming Soon</p>	 <p>7 A R 121lb</p>	
 <p>8 A R 165lb</p> <p>3/8 Bolt</p>	 <p>3/8 Bolt</p>	 <p>8 A R 165lb</p> <p>3/8 Bolt</p>	 <p>3/8 Bolt</p>	 <p>3/8 Bolt</p>

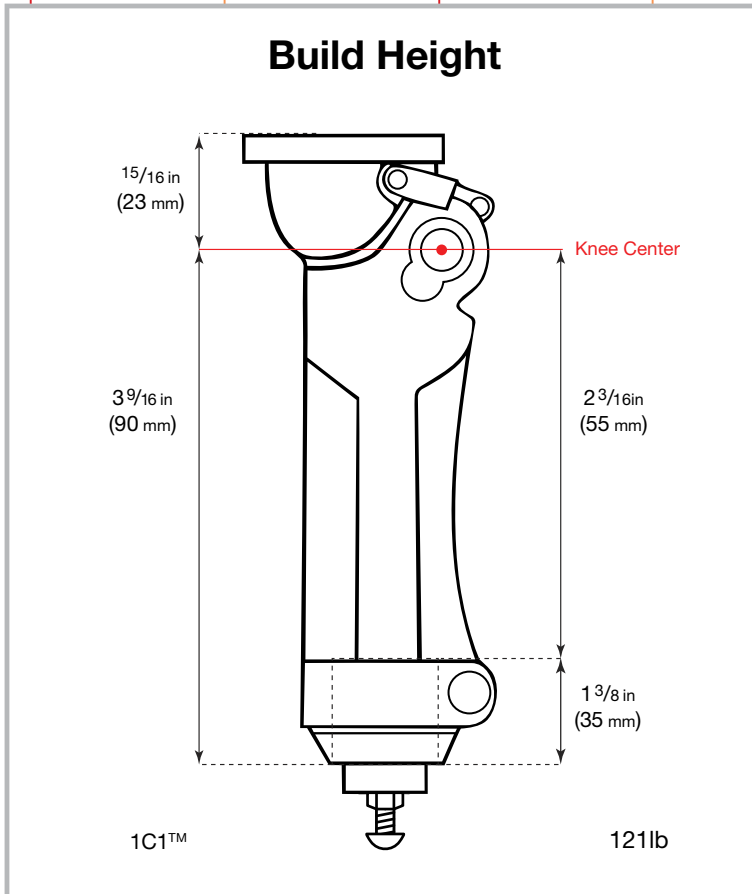

	STOCK	MATERIAL	FULL INFO
1	GUPAC-4HLAM	AA	Pg. 96
2	GUPAC-MLAM	A	Pg. 96
3	TSC-WC	AA	Pg. 94
4	TSC-KDC-L	AA	Pg. 94
5	GUPAC-F4H	A	Pg. 98
6	TKC-C4	AA	Pg. 96
7	TWP-C2	N	Pg. 97
8	GUPAC-MP1	S	Pg. 98

MATERIALS

- A** = Aluminum Alloy
- AA** = Aerospace Aluminum
- C** = Carbon Graphite
- S** = Stainless Steel
- T** = Titanium

ADJUSTABILITY

- A** = Angular
- R** = Rotational
- S** = Sliding